



ChuckPuck™

Contact Us
for Custom
Orders!



FLEXIBLE FOAM DISK FOR PLUGGING LATHE CHUCK THROUGH-HOLES

- Keeps swarf and coolant from accumulating in the spindle bore
- Reduces vibration
- Reduces wear on chuck and spindle
- Improves roundness and concentricity
- Fire retarded for safety


DIMENSIONS IN MILLIMETERS

Part No.	Nominal Size (Free Dia.)	Best Fitting Chuck Bore	Min. Bore	Max. Bore	Pkg Qty
CP 12035	35 mm	33 mm (KITIGAWA B205)	30 mm	34 mm	2
CP 12048	48 mm	45 mm (KITIGAWA B206)	42 mm	47 mm	2
CP 12055	55 mm	52 mm (KITIGAWA B208)	49 mm	54 mm	2
CP 12080	80 mm	75 mm (KITIGAWA B210)	72 mm	78 mm	2

Material: Flame-resistant neoprene foam

Ordering Information

Measure your chuck bore and order the nominal diameter to suit.
(Your chuck bore must be between the max. and min. bore sizes).
Contact us for custom sizes

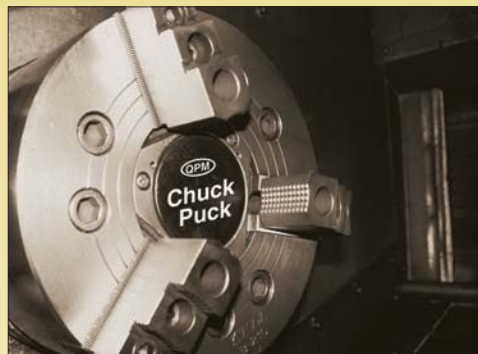

ChuckPucks install easily.
Just squeeze them into the chuck hole.